


N238-16 2016-On Suzuki GSX-S750

Congratulations! You have just purchased a set of **T-Rex Racing** Frame sliders. These frame sliders have been designed to minimize the damage to your sport bike in the event of a fall or tip over. They are the strongest possible design that we created. They can absorb about 50% more impact than the direct-bolt on sliders since the brackets take most of the impact onto themselves and transfer only a small portion to the frame. Whereas the direct bolt-on sliders transfer the entire impact onto the frame. The brackets are made of aircraft grade 6061-T6 aluminum alloy and anodized using Japanese dies and treatment process. The color are UV-treated and fade-resistant. The slider pucks are made of UHMW-PE, a tough type of plastic used in many industrial ball bearing and conveyor application. They are made solid, not hollowed out in the center like those of competitors. They are machined and shaped to flow with the bike instead of the old-fashioned round puck sticking out from the fairing. The pucks are also wider which in turn allow 30-80% increase in contact surface and strength. The bolts are made of strongest grade 12.9. We carry all the replacement parts for the sliders. Please feel free to email us at customerservice@t-rex-racing.com or call 972-243-7868 if you have any question.

Important: T-Rex Racing requires that this product to be installed by a certified technician. It is important that manufacturer torque specification is applied correctly to all the bolts involving with the installation. Please refer to the service manual for exact number. Medium strength thread-lock compound is highly recommended for use on the bolts involved with the installation. All screws, bolts, and nuts need to be checked after driving the first 20 mile (or 30km) to ensure that all are tightened properly. Check for any sign of looseness or irregularity. If found, do not use the system. Contact us promptly. Maintain the speed limit. Note that this online instruction is the most updated version and take precedence over the printed version.

Installation Instructions:

Parts Lay-out Diagram:

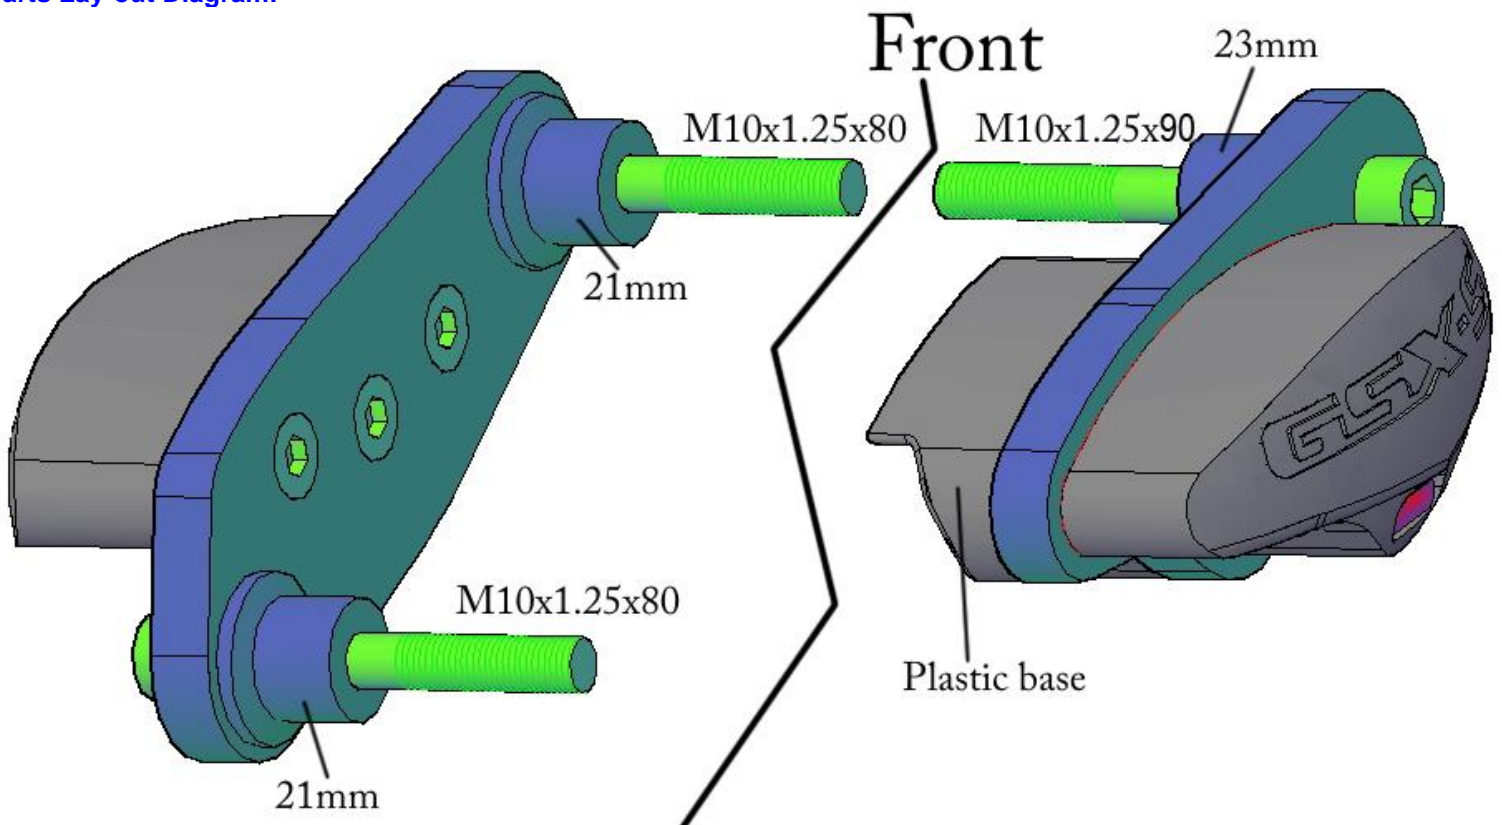

Note: Before proceeding with the installation, re-tighten the three screws attaching the slider plastic pucks to the brackets.

1. Start with the left side. Remove the two stock engine bolts at circled locations in the picture 1 on the next page.
2. Attach the left side assembly using the components shown in the lay-out diagram. Tighten the two new engine bolts to manufacturer's specification.
3. Move to the right side and remove the stock engine bolt at circled location in the picture 2 on the next page.
4. Attach the right side assembly using the components shown in the lay-out diagram. Make sure the plastic base sit securely on the frame. Tighten the new engine bolt to manufacturer's specification.



www.T-Rex-Racing.com

©All T-rex Racing products are protected under copyright law. A copy of the design of this link has been registered with the US Copyright and Patent office. We work with Federal laws also provide civil and criminal penalties and fines up to \$250,000 for the unauthorized reproduction, distribution or sale of copyrighted design (Title 17, United States Code, Section 501 and 508). The FBI investigates allegations of criminal copyright infringement (Title 17, United States Code, Section 506).

We will work with our attorney, The law office of Daniel Swayze, in Plano TX and our eBay account manager to actively enforce our rights. eBay will remove copyrighted products and suspend respective sellers

Disclaimer:

The purchaser and user of this product releases T-Rex Racing, Inc., its distributors and resellers of any liability pertaining to installation and uses of the purchased parts. This liability includes but not limit to personal injury, vehicle and property damages, lost business, direct or indirect expenses accrued or associated with the installation and use. Purchaser recognizes that any alteration or modification to the vehicle may increase the risk of injury, accident or vehicle damage. Follow your bike manufacturer's recommendation and inspect your bike for any sign of looseness or irregularity before each ride. This product does not guarantee that it will protect you or your bike in case of a fall, a tip over or drop. **If you have any suggestion for improvement or an idea for new product please email us at customerservice@t-rex-racing.com or call us at 972-243-7868.**

